
SPITZNAS
CUSTOMIZED POWER SOLUTIONS



DRILLS WITH FEED SPINDLE

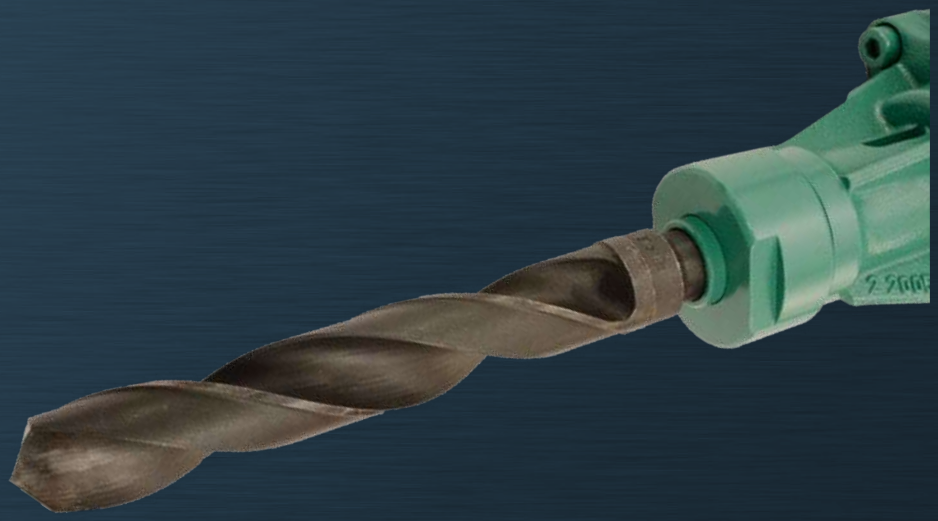

CSI srl - Genova
www.csiadvice.it

PNEUMATIC

ATEX

SYSTEM CONCEPT




Handle
with sound absorber



Safety lever valve
or saftey twist throttle



Air connection

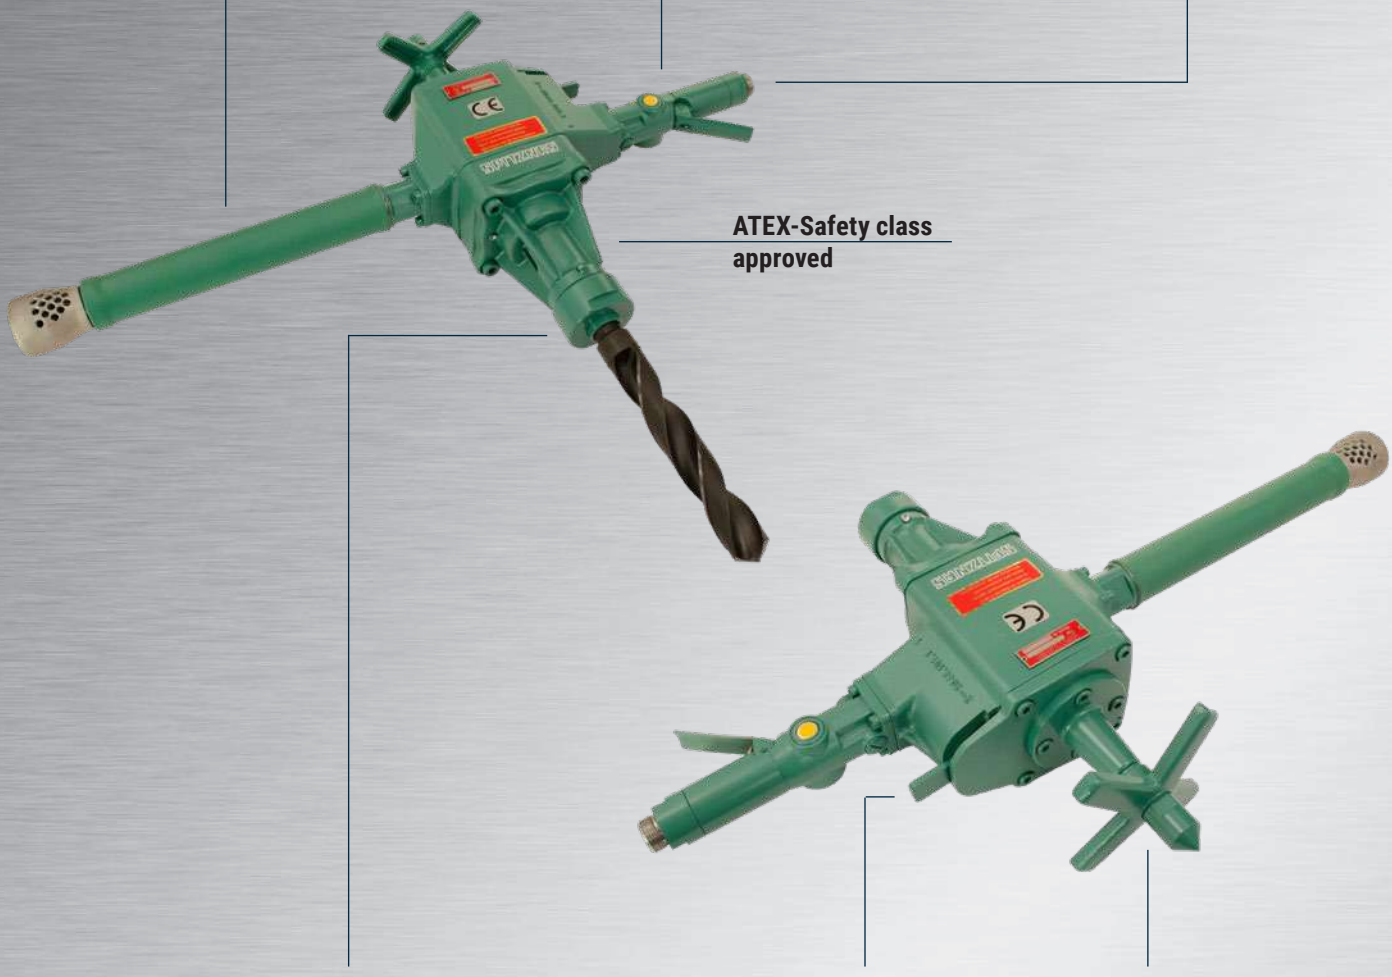

ATEX-Safety class
approved

Drill chuck



Direction of rotation right or reversible



Feed spindle with centering



PNEUMATIC

The pneumatic drill with feed spindle are available for different drilling diameter and speed, as well with direction of rotation right or reversible.



PNEUMATIC | **OPERATING PRESSURE** 6 Bar | **ATEX**


ORDER NO.	ATEX Specification	Drill chuck	Valve type	Direction of rotation	Max. drilling diameter in steel	Speed (under load)	Power	Air consumption	Noise level LpA	Vibration level	Weight
					mm	rpm	kW	m³/min	dB(A)	m/s²	kg
2 1401 0010		MT2	Safety lever valve	right	20.00	325	0.68	0.68	93.5	<2.5	5.0
2 1401 0030		MT2	Safety twist throttle	right	20.00	325	0.68	0.68	93.5	<2.5	5.0
2 1402 0010		MT3	Safety lever valve	right	25.00	40	0.68	0.68	93.8	<2.5	8.0
2 1402 0030		MT3	Safety twist throttle	right	25.00	40	0.68	0.68	93.8	<2.5	8.0
2 2502 0010	II2GExhIIBT6Gb	MT4	Safety lever valve	right/left	50.00	80	1.85	2.00	87.0	<2.5	17.2
2 2502 0030	II2GExhIIBT6Gb	MT4	Safety twist throttle	right/left	50.00	80	1.85	2.00	87.0	<2.5	17.2
2 2506 010	II2GExhIIBT6Gb	MT3	Safety lever valve	right/left	32.00	220	1.85	2.00	87.0	<2.5	14.7
2 2506 0030	II2GExhIIBT6Gb	MT3	Safety twist throttle	right/left	32.00	220	1.85	2.00	87.0	<2.5	14.7
2 2082 0010	II2GExhIIBT6Gb	MT3	Safety lever valve	right	32.00	200	1.00	1.20	92.0	3.3	12.5
2 2082 0030	II2GExhIIBT6Gb	MT3	Safety twist throttle	right	32.00	200	1.00	1.20	92.0	3.3	12.5
2 2084 0010	II2GExhIIBT6Gb	MT2	Safety lever valve	right	23.00	200	1.00	1.20	92.0	3.3	12.0
2 2084 0030	II2GExhIIBT6Gb	MT2	Safety twist throttle	right	23.00	200	1.00	1.20	92.0	3.3	12.0
2 2085 0010	II2GExhIIBT6Gb	MT2	Safety lever valve	right/left	23.00	250	1.00	1.20	92.0	3.3	12.0
2 2085 0030	II2GExhIIBT6Gb	MT2	Safety twist throttle	right/left	23.00	250	1.00	1.20	92.0	3.3	12.0
2 2089 0010	II2GExhIIBT6Gb	MT3	Safety lever valve	right/left	32.00	250	1.25	1.50	92.0	3.3	12.5
2 2089 0030	II2GExhIIBT6Gb	MT3	Safety twist throttle	right/left	32.00	250	1.25	1.50	92.0	3.3	12.5

Subject to technical change.

Performance data at an operating pressure of 6 bar.

SYSTEM ACCESSORIES

SERVICE UNITS



ORDER NO.	Pos.	Description
9 2406 0260	1	Portable service unit with pressure regulator 3/4"
9 2406 0650	2	Portable service unit with protection housing and pressure regulator 3/4"

MISCELLANEOUS ACCESSORIES



ORDER NO.	Description
9 9902 0120	Multi oil for cleaning and protection

More accessories on request.

DRILL RANGE













CSI srl

Via Fereggiano, 24A 16144 Genova GE
Tel: (+39)0103013323 Fax: (+39)0100961990
E-Mail: sales@csiadvice.it Internet: http://www.csiadvice.it